


Lite Scale

AMER



Certified
Environmental
Product Declaration
www.nsf.org

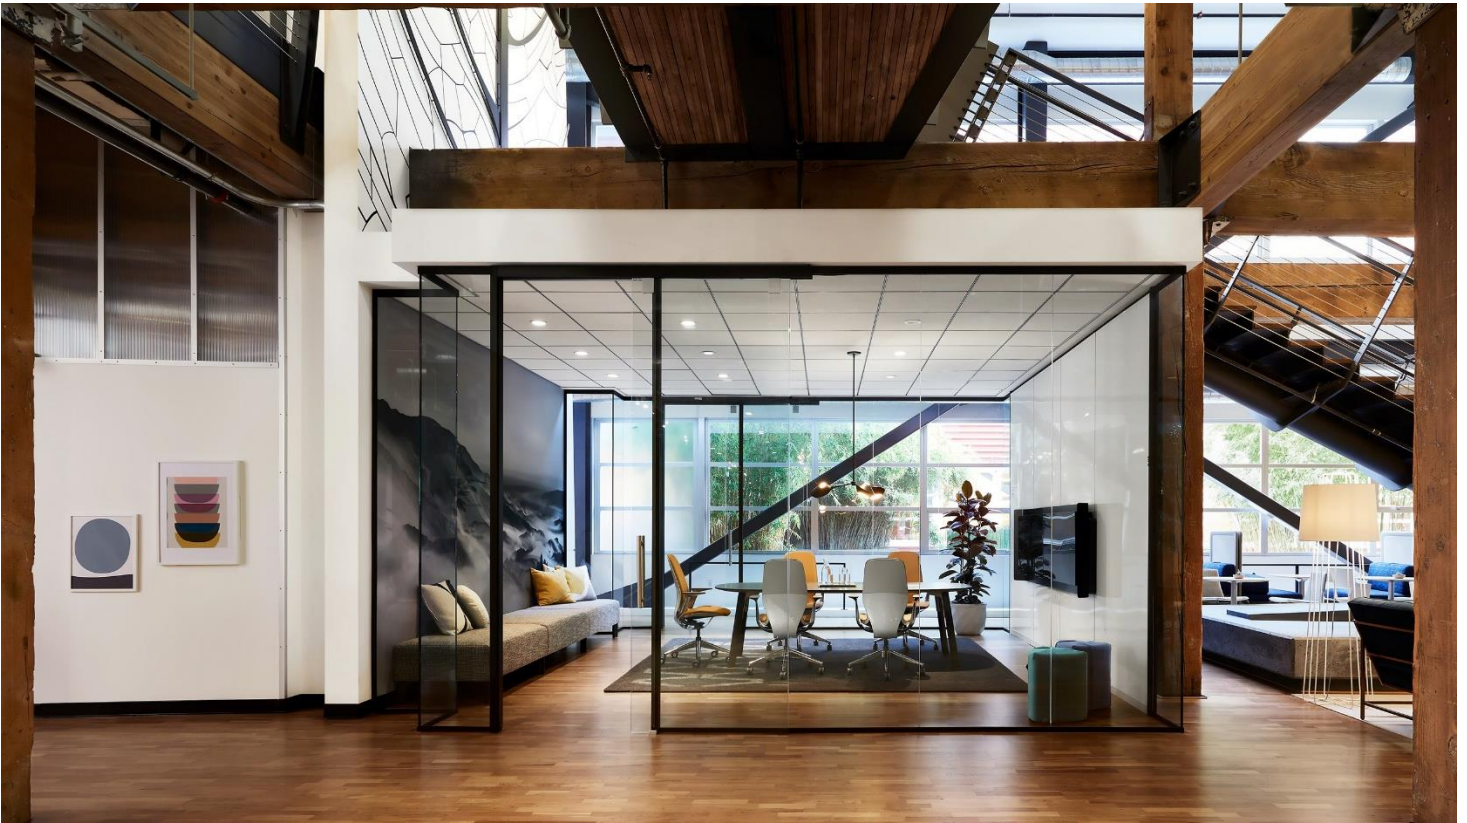

About this product

Lite Scale Glazing is a ½" glass solution with a minimalist recessive design meant to integrate with our other modular wall systems along with traditional construction.

The reference product is Lite Scale glass front with sliding door. All frames in factory-painted finish, all door hardware in black to match frames. The sliding door includes non-locking door pull and optional drop seal on the leaf. The floor space is 0.3 m² meaning 3.37 units are required to meet the functional unit of 1 m² of physical floor space. A replacement of the glass component is required for a 10-year reference service life.

Date of Issue: March 9th, 2026

Date of Expiration: March 9th, 2031

Learn more

- Explore Steelcase environmental philosophy and commitments [overview](#).
- Find product details and sustainability certifications on the [product page](#) at steelcase.com.
- See our product [warranty](#).

About this document

This declaration describes the Life Cycle Assessment of Lite Scale produced for the Americas market by Steelcase Inc. in Athens, Alabama. The assessment is performed according to the ISO standards 14040 (2006), 14044 (2006) and 14025 (2006), and BIFMA PCR for Office Furniture Workspace v2 March 2025: UNCPC 3814 to generate an EPD for business-to-business communication.

- Contact epd@steelcase.com for any EPD-related questions or inquiries.

ASSESSMENT OVERVIEW

EPD commissioner	Steelcase® Inc
Corporate Address	901 44th Street SE Grand Rapids, Michigan 49508-7594 United States
Product group	Workspace
Product name	Lite Scale
Product intended use	Office furniture
Product reference service life	10 years
Reference standards	ISO 14025, ISO 14040, ISO 14044, ISO 21930
EPD scope	Cradle-to-gate with options A1-A3, A4-A5, B1, B4, C1-C4, and optionally D
EPD number	EPD11211
Date of issuance	March 9th, 2026
Date of expiration	March 9th, 2031
EPD type	Product specific
EPD Product Coverage	Lite Scale for the Americas market
Intended audience	Business to business (B2B)
Year of reported manufacturer data	2025
Functional unit	One square meter of physical floor space for a reference service life of 10 years
Applicable markets/regions	AMER
LCA software and database version	GaBi 10.6.2.9; GaBi database, 2022.2
LCIA methodology and version number	TRACI 2.2, CML2001, IPPC AR6, ISO 21930
Program administrator	NSF Certification LLC 789 N. Dixboro, Ann Arbor, MI 48105 www.nsf.org
Reference PCR and version number	BIFMA PCR for Office Furniture Workspace Products UNCPC 3814, Version 2
PCR reviewer	Review Panel Chaired by Alex Misna
EPD reviewer	External review conducted by:  Jim Mellentine, Thrive ESG This declaration and its Life Cycle Assessment was independently verified in accordance with ISO standards 14040 (2006), 14044 (2006) and 14025 (2006), BIFMA PCR for Office Furniture Workspace v2 March 2025, and ISO 21930.
LCA reviewer	External review conducted by:  Jim Mellentine, Thrive ESG The product Life Cycle Assessment was conducted in accordance with ISO 14044, ISO 21930, and the reference PCR.
Disclaimer	The PCR this EPD was based on was written to determine the potential environmental impacts of a workspace product from cradle-to-gate with options A1-A3, A4-A5, B1, B4, C1-C4, and optionally D. It was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

ASSESSMENT PARAMETERS

Functional unit


One square meter of physical floor space for a reference service life of 10 years under ANSI/BIFMA X5.6-2016 (R2021), Panel Systems.

The floor space of the referenced model is 0.3 m² meaning 3.37 units are required to meet the functional unit of 1 m² of physical floor space. All the Lite Scale components have the standard Limited Lifetime Warranty except for door and glass which are 5 years. 2 units of the glass component are included to meet the 10-year warranty requirements.

Product scope

The products assessed are Lite Scale:

FELGCCTS - ceiling track, single
 FELGB - glazing block
 FELGCC - glazing channel, ceiling
 FELGCF - glazing channel, floor
 FELGCFTS - floor track, single
 FELGCVT - glass channel, vertical
 FELGSM - glazing shim, medium
 FELGSS - glazing shim, small
 FELGSVT - glass channel, stop
 FELGTC - glazing tape, clear
 GPGSDFHSS - door frame, gs, sliding, polished edge, full ht, single
 GPGSDTSS - door track, gs, sliding, single
 GPLVT - vertical transition, ls to pw/gs
 GPLVTHA - vertical transition, hdwr, attachment
 FELGLBG - glass, butt glazed
 FELVTSSS - vertical transition, stop safety spring
 GPGSDFHSS - door leaf, gs, sliding, polished edge, full ht, single
 GPFS121 - feature strip, inline, painted
 GPME - mini-end

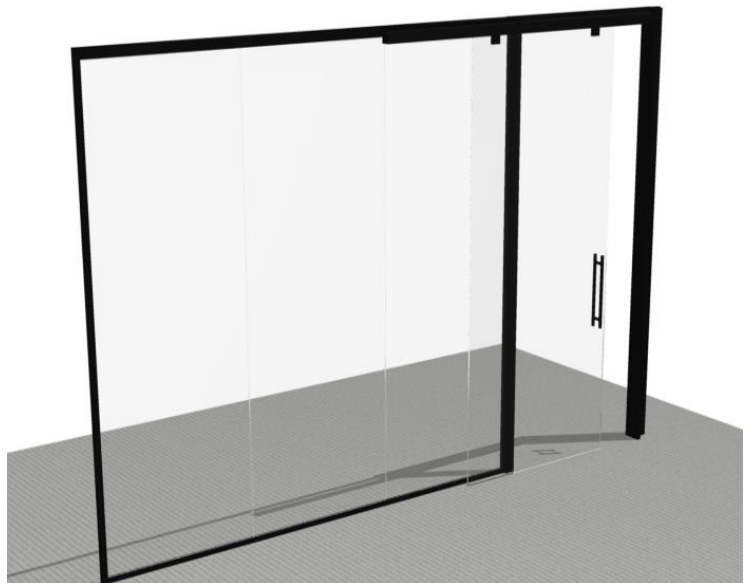

This is a typical application that represents both sliding door and swing door options within Lite Scale's statement of line. Results presented on the subsequent pages are for Lite Scale manufactured in Steelcase's Athens, Alabama plant.

The Lite Scale system is classified as subcategory Option F: Pods— Privacy (room in a room) per the PCR.

Assessment goal and scope

The potential environmental impacts of Lite Scale and its packaging throughout its entire life cycle – including raw materials extraction, production, transport, use, and end of life – were assessed. In the absence of primary information, the GaBi database was used for secondary data.

The life cycle stages included in this assessment follow the BIFMA PCR for Office Furniture Workspace Products UNCPC 3814, Version 2. Material acquisition and pre-processing (including transportation), production, distribution, use and end-of-life are assessed for the systems product.

Assessment boundary

The Life Cycle Assessment considers the full life cycle of the product as described here from cradle to gate A1-A3 with options, A4-A5, B1, B4, C1-C4, and optionally Module D. Life cycle stages included in this assessment follow the BIFMA PCR for Office Furniture Workspace V2 March 2025: UNCPC 3814. Because the BIFMA PCR serves as the core PCR, life cycle stages and phases are first presented according to the PCR for Workspace.

	Stage	Status
	<i>Cradle to inbound gate</i>	
	MATERIALS ACQUISITION	
	Raw material extraction, pre-processing and transportation of materials to suppliers.	
	A1. Raw material supply	✓
	A2. Transport	✓
	<i>Gate to gate</i>	
	PRODUCTION PROCESS	
	Transportation of furniture components and materials from Tier 1 suppliers to Steelcase final manufacturing facility. External and internal production	
	A3. Manufacturing	✓
	<i>Gate to grave</i>	
	DISTRIBUTION, USE AND END OF LIFE	
	Distribution of products, installation, use and end of life.	
	A4. Transport	✓
	A5. Installation	✓
	B1. Use	✓
	B2. Maintenance/cleaning	MND
	B3. Repair	MND
	B4. Replacement	✓
	B5. Refurbishment	MND
	B6. Operational energy use	MND
	B7. Operational water use	MND
	C1. Disassembly	✓
	C2. Transport	✓
	C3. Waste processing	✓
	C4. Disposal	✓
	<i>Beyond the boundary</i>	
	D. Reuse/recovery	MND


MATERIALS

The product composition, packaging composition, pre- and post-consumer recycled content, and recyclability visuals below relate specifically to 1 m² of the Lite Scale configuration listed above, including one glass replacement.

Product composition per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Glass	654.11	72.19%	0	0	20	130.82
Steel	62.60	6.91%	24	15.02	22	13.77
Aluminum	177.62	19.60%	0	0	14	24.87
Adhesive	6.87	0.76%	0	0	0	0
PU Foam	0.59	0.07%	0	0	0	0
Rubber	3.11	0.34%	0	0	0	0
Others	1.25	0.14%	0	0	0	0
Total	906.15	100%	--	15.02	--	169.46


Product packaging per functional unit			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Cardboard	332.81	64.06%	40	133.12	0	0
Solid wood	169.39	32.60%	0	0	0	0
Paper	1.03	0.20%	0	0	0	0
EPP	16.34	3.14%	0	0	0	0
Total	519.56	100%	--	133.12	--	0

Product recycled content* and recyclability** summary



**TOTAL RECYCLED
CONTENT ***

*Total recycled content based on supplier's data. The source of recycled content of various materials could be either post-industrial or post-consumer based on market availability. Excludes packaging.



**RECYCLABILITY
BY WEIGHT****

**Recyclability: this recyclability rate is the maximum amount of the product that is recyclable, based on the availability of recycling facilities in the specified regions and the ability of the product to be disassembled. Note that, per the requirements of the PCR, the end-of-life results presented in this EPD were calculated using the US EPA's recycling rates within the 2020 Municipal Solid Waste Report for parts that can be disassembled. Excludes packaging.

RESULTS

Life cycle impact by category and stage


Environmental impacts were calculated using the GaBi software platform. Impact results according to the BIFMA PCR have been calculated using TRACI 2.2, IPCC AR6, CML200, and ISO 21930 for multiple LC indicators. Results presented in this report are for one square meter of physical floor space for one occupant for 10 years. Additionally, the results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins. Use stage modules B2, B3, B5-B7 not declared. Module B4 includes results of the replacement parts.

Methods: IPCC AR6, TRACI 2.2, ISO 21930, CML 2001

Environmental impact indicators	Unit	Production	Construction		Use		End of Life				Totals
		A1–A3	A4	A5	B1	B4	C1	C2	C3	C4	
(GWP) Global warming potential 100 years excludes biogenic carbon	kg CO ₂ eq	2.47E+03	2.40E+02	8.02E+01	0	1.44E+02	0	1.34E+00	7.78E+01	1.43E+00	3.01E+03
(GWP) Global warming potential 100 years includes biogenic carbon	kg CO ₂ eq	1.67E+03	2.41E+02	1.45E+02	0	1.01E+02	0	1.35E+00	1.43E+02	1.42E+00	2.30E+03
(AP) Acidification potential	kg SO ₂ e	1.32E+01	1.34E+00	2.39E-01	0	2.93E+00	0	8.10E-03	2.24E-01	7.30E-03	1.79E+01
(POCP) Photochemical ozone creation	kg O ₃ eq	1.36E+02	3.08E+01	1.62E+00	0	2.56E+01	0	2.15E-01	1.23E+00	1.31E-01	1.95E+02
(EP) Eutrophication - marine	kg N eq	3.71E+00	1.25E+00	8.44E-02	0	5.46E-01	0	6.97E-03	7.16E-02	3.64E-03	5.67E+00
(ODP) Ozone depletion	kg CFC-11eq	5.36E-07	6.77E-11	1.42E-11	0	2.49E-07	0	3.67E-13	1.36E-11	4.34E-12	7.85E-07
Carbon emissions and removals											
(BCRP) Biogenic carbon removal from product	kg CO ₂ eq	0.00E+00	0.00E+00	0.00E+00	0	0.00E+00	0.0 0E +00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(BCEP) Biogenic carbon emission from product	kg CO ₂ eq	0.00E+00	0.00E+00	0.00E+00	0	0.00E+00	0.0 0E +00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(BCRK) Biogenic carbon removal from packaging	kg CO ₂ eq	0.00E+00	0.00E+00	0.00E+00	0	0.00E+00	0.0 0E +00	0.00E+00	0.00E+00	0.00E+00	7.84E+02
(BCEK) Biogenic carbon emission from packaging	kg CO ₂ eq	0.00E+00	0.00E+00	6.96E+02	0	8.84E+01	0	0.00E+00	0.00E+00	0.00E+00	7.84E+02
(BCEW) Biogenic carbon emission from combustion of renewable waste used in production	kg CO ₂ eq	0.00E+00	0.00E+00	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(CCE) Calcination carbon emissions	kg CO ₂ eq	0.00E+00	0.00E+00	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(CCR) Carbonation carbon removal	kg CO ₂ eq	0.00E+00	0.00E+00	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(CWNR) Carbon emission from combustion of non-renewable waste used in production	kg CO ₂ eq	0.00E+00	0.00E+00	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Output flows and waste categories											
(HWD) Hazardous waste disposed	kg	4.98E-08	0.00E+00	0.00E+00	0	4.97E-08	0	0.00E+00	0.00E+00	0.00E+00	9.96E-08
(NHWD) Non-hazardous waste disposed	kg	2.55E+01	0.00E+00	0.00E+00	0	2.54E+01	0	0.00E+00	0.00E+00	0.00E+00	5.09E+01
(HLRW) High-level radioactive waste, conditioned, to final repository	kg	5.54E-04	1.26E-05	1.32E-06	0	7.59E-06	0	6.86E-08	1.20E-06	2.70E-07	5.77E-04
(ILLRW) Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	5.23E-01	1.06E-02	1.17E-03	0	5.84E-02	0	5.76E-05	1.06E-03	2.37E-04	5.94E-01
(CRU) Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(MFR) Materials for recycling	kg	5.57E+00	0.00E+00	3.05E+02	0	3.96E+01	0	0.00E+00	0.00E+00	0.00E+00	3.50E+02
(MER) Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(EEE) Recovered electrical energy exported from the product system	MJ	2.34E-01	0.00E+00	7.53E+01	0	9.62E+00	0	0.00E+00	0.00E+00	0.00E+00	8.52E+01
(EET) Recovered thermal energy exported from the product system	MJ	1.06E-01	0.00E+00	3.59E+01	0	4.34E+00	0	0.00E+00	0.00E+00	0.00E+00	4.03E+01
Resource use indicators											
(RPRr) Renewable primary resources used as energy carrier	MJ	8.01E+03	1.28E+02	9.72E+00	0	0	0	6.10E-01	8.60E+00	3.07E+00	7.17E+03
(RPRm) Renewable primary resources with energy content used as material	MJ	7.37E+03	0.00E+00	0.00E+00	0	1.66E+03	0	0.00E+00	0.00E+00	0.00E+00	9.03E+03
(NRPRr) Non-renewable primary resources used as energy carrier	MJ	3.25E+04	3.08E+03	9.16E+01	0	6.85E+03	0	1.69E+01	6.07E+01	2.16E+01	4.26E+04
(NRPRm) Non-renewable primary resources with energy content used as material	MJ	9.10E+02	0.00E+00	0.00E+00	0	6.55E+01	0	0.00E+00	0.00E+00	0.00E+00	9.75E+02
(SM) Secondary materials	kg	2.15E+02	0.00E+00	0.00E+00	0	5.76E-01	0	0.00E+00	0.00E+00	0.00E+00	2.16E+02
(RSF) Renewable secondary fuels	MJ	0	0.00E+00	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(NRSF) Non-renewable secondary fuels	MJ	0	0.00E+00	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00
(RE) Recovered energy	MJ	0	0.00E+00	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00

(FW) Net freshwater use including water from electricity generation	M3	3.97E+01	1.38E-01	1.10E-01	0	8.37E-01	0	6.66E-04	1.09E-01	2.35E-03	4.09E+01
Primary energy demand (renewable-nonrenewable energy and materials)	MJ	4.88E+04	3.21E+03	1.01E+02	0	7.59E+03	0	1.76E+01	6.93E+01	2.46E+01	5.98E+04
(ADP) abiotic depletion potential fossil	MJ	2.79E+04	3.05E+03	8.83E+01	0	1.94E+03	0	1.68E+01	5.77E+01	2.09E+01	3.31E+04

Global warming potential summary

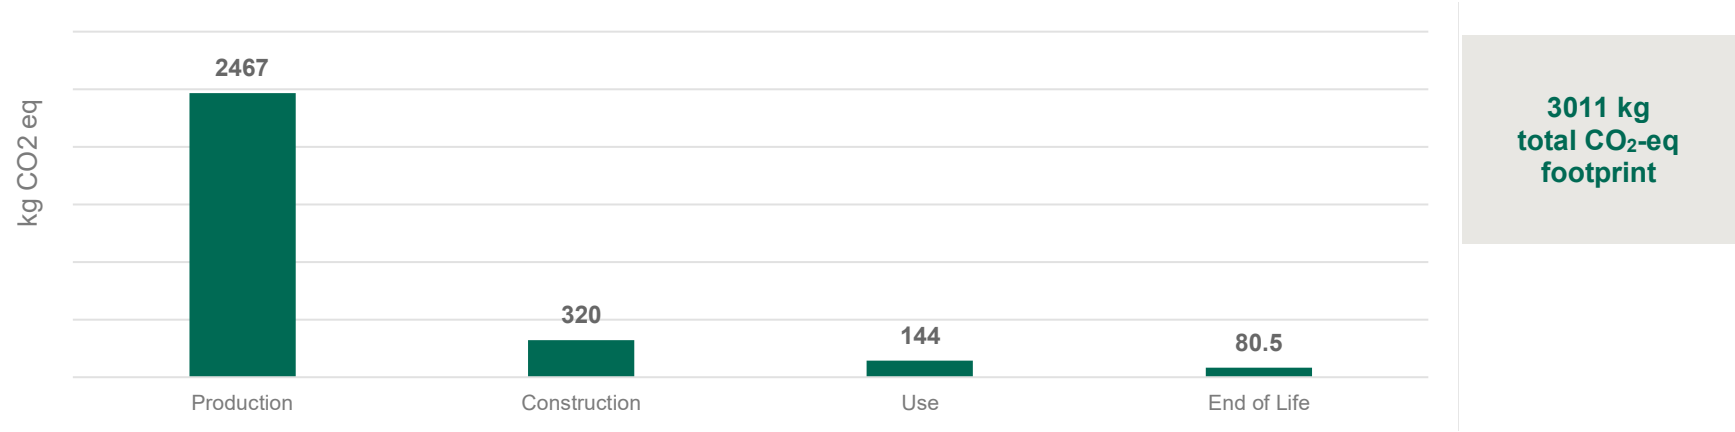

TECHNICAL INFORMATION AND SCENARIOS FOR MODULES BEYOND THE FACTORY GATE

A4: Transport to the installation site		
Parameter	Value per product	Value per product
Transportation type	Truck trailer	Ship
Fuel consumption (l/km)	0.42 diesel	130 heavy fuel oil
Distance*	1715 km	119 km
*Weighted average distance per product market share		

A5: Installation in the building	
Parameter	Value per functional unit
Installation Assumptions	No product waste Installed with hand tools
Energy use for installation	0 kWh
Transportation type for installation waste	Truck
Fuel consumption (l/km)	0.42 diesel
Distance	32.2 km
Cardboard + paper for recycling	227.68 kg
Plastic for recycling	2.31 kg

B1, B2, B3, B4, B5, B6, B7: Use
There are no emissions, resources used, or transportation related to these modules

C1- C4: End-of-life	
Parameter	Value per functional unit
Method of deconstruction	Hand tools
Method of recycling	Mechanical recycling
Method of energy recovery	Incineration
Final disposal of remaining parts	Landfilling
Transportation type	Truck
Fuel consumption (l/km)	0.42 diesel
Distance to waste processing site	32.2 km
Weight to recycling	445.51 kg
Weight to energy recovery	196.04 kg
Weight to landfill	784.16 kg


ADDITIONAL ENVIRONMENTAL INFORMATION

The following product composition, packaging composition, pre- and post-consumer recycled content and the global warming potential results represent the Lite Scale configuration in this study without scaling to the functional unit.

Product composition			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Glass	97.09	56.48%	0	0	20	19.42
Steel	18.58	10.81%	24	4.46	22	4.09
Aluminum	52.72	30.67%	0	0	14	7.38
Adhesive	2.04	1.19%	0	0	0	0
PU Foam	0.18	0.10%	0	0	0	0
Rubber	0.92	0.54%	0	0	0	0
Others	0.37	0.22%	0	0	0	0
Total	171.90	100%	--	4.46	--	30.89

Product packaging			Post-consumer		Pre-consumer	
Material	Weight (kg)	Weight (%)	%	Weight (kg)	%	Weight (kg)
Cardboard	98.39	72.06%	40	39.36	0	0
Solid wood	33.52	24.55%	0	0	0	0
Paper	0.27	0.20%	0	0	0	0
EPP	4.36	3.19%	0	0	0	0
Total	136.54	100%	--	39.36	--	0

IPCC AR6	Unit	Production	Construction		Use		End of Life		C3	C4	Totals
		A1–A3	A4	A5	B1	B4	C1	C2			
(GWP) Global warming potential 100 years excludes biogenic carbon	kg CO2eq	7.33E+02	7.13E+01	2.38E+01	0	0	0	3.99E-01	7.78E+01	4.24E-01	9.06E+02

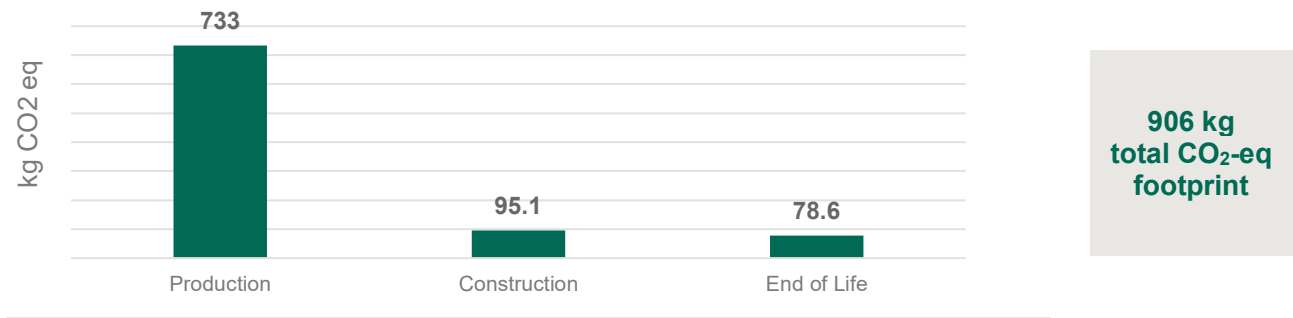

Indoor air: Steelcase Systems products are certified with SCS's Indoor Advantage Gold™ program, conforming to the ANSI/BIFMA Furniture Emissions Standard (M7.1/X7.1-2011 R2021) and CDPH/EHLB Standard Method (CA 01350) v1.2-2017. The certification can be found [here](#).

Improper disposal of product: At the end of its useful life, manage Steelcase products correctly in accordance with all applicable regulations for effective end-of-life management, including recycling, disposal, or incineration. Improper management may result in the release of chemicals that may represent a risk to the environment and human health & safety.

REFERENCES

ANSI/BIFMA X5.5-2021, Desk and Table Products.

ANSI/BIFMA X5.6-2016 (R2021), Panel Systems.

ANSI/BIFMA X5.9, Storage Units.

ANSI/BIFMA e3, Furniture Sustainability Standard.

ACLCA Guidance to Calculating Non-LCIA Inventory Metrics in Accordance with ISO 21930:2017. May 2019

BIFMA PCR for Office Furniture Workspace V2 March 2025: UNCPC 3814

ISO 14025:2006 Environmental Labels and Declarations – Type III Environmental Declarations – Principles and Procedures.

ISO 14040:2006 Environmental Management – Life Cycle Assessment – Principles and Framework, Requirements and Guidelines.

ISO 14044:2006 Environmental Management – Life cycle assessment – Requirements and Guidelines.

ISO 14044: 2006/ Amd 1:2017 Environmental Management – Life cycle assessment – Requirements and Guidelines – Amendment 1.

ISO 21930:2017 Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services.

Life Cycle Assessment, LCA Report for Workspace Products by Steelcase. October 2025.

NSF Certification Policies for Environmental Product Declarations (EPD). November 1, 2022.



Visit steelcase.com



facebook.com/Steelcase



twitter.com/Steelcase



youtube.com/SteelcaseTV

Contact

For further questions, please contact:
epd@steelcase.com